



WARNING: Island and structures should always be contructed of noncombustible materials with adequate ventilation.

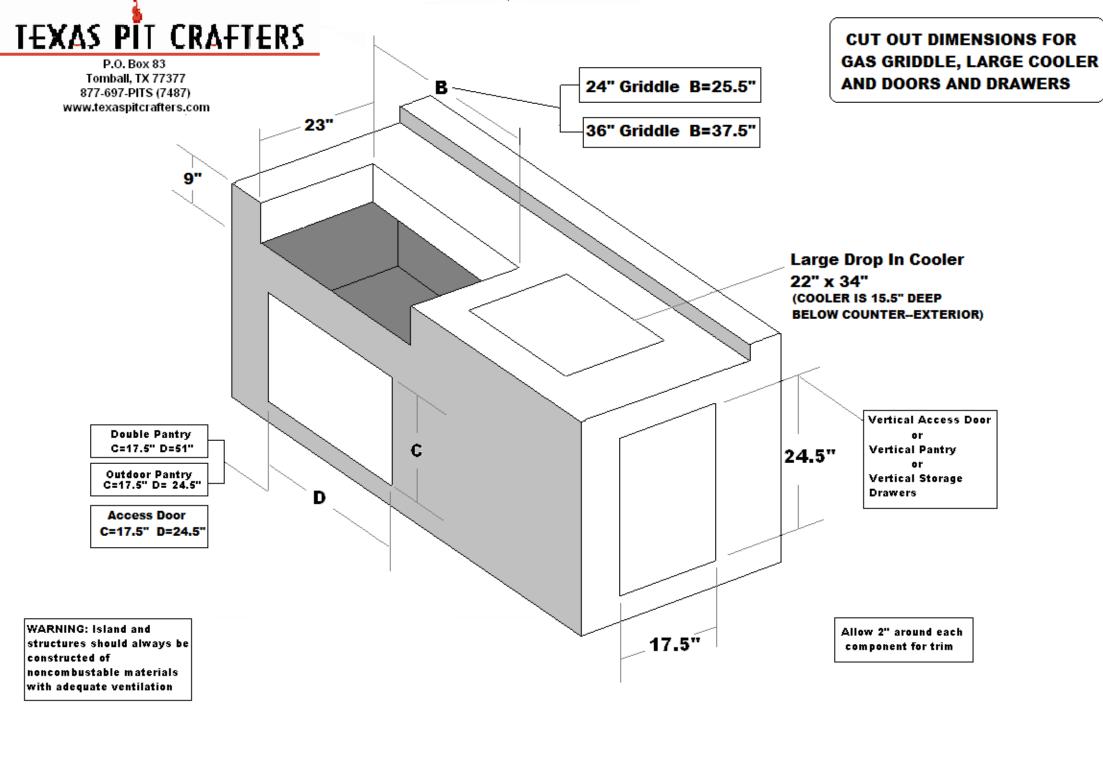

top view



hole in face of island for adjustable charcoal rack key

Place vent on side of island opposite of smokestack.

vent this side

2" trim on all 4 sides Pit is supported by trim in cut out opening.

21" opening


Allow 11" behind cut out for dome lid to open

Texas Pit Crafters recommends all heat generating outdoor kitchen components, such as pits, grills and burners, be installed in structures built using all non-combustible materials.


## TEXAS PIT CRAFTERS

PM 500 & PM 500 S P.O. Box 83 Tomball, Tx 77377 Built-In BBQ Pit/Smoker 877-697-PITS (7487) Cut-Out Dimensions www.texaspitcrafters.com Access Door 18.5" Wood Storage Drawer If Back splash or wall is located behind unit, a minimum of 11" clearanceis required Allow 3" around cut-outs Drop-In Pit Access Door for supporting trim Fire Box Wood Storage Drawer **WARNING: Island and structures** should always be constructed of Allow 3" around each noncombustable materials with adequate ventilation component for trim

## TEXAS PIT CRAFTERS

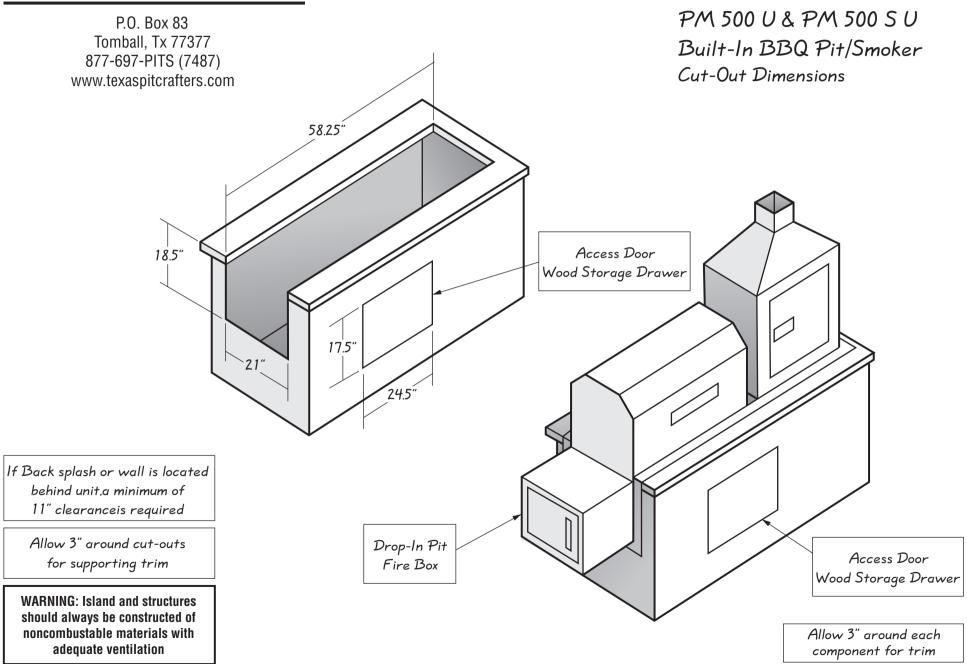

## TEXAS PIT CRAFTERS

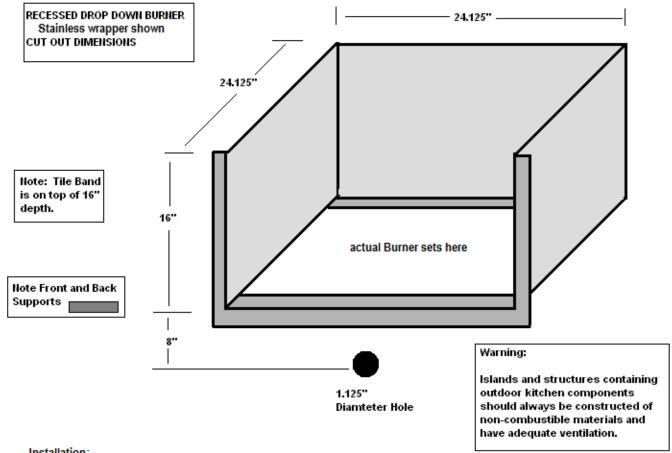

Installation: The front edge of Recessed Burner slides back into opening